



[PPFD CHART](#)
[INSTALLATION](#)

## SPECIFICATIONS

Power	720W
PPE	2.7 $\mu\text{mol}/\text{J}$
PPF	1,944 $\mu\text{mol}$
Thermal Management	Passive
Dimmer	Manual knob + RJ14 port
Certification	cETL, DLC
Fixture Dimensions	42" x 44.5"
Spectrum	Full Spectrum
LED Quantity	2220 pcs
Footprint	4' X 4'
Warranty	5 years

## FULL SPECTRUM

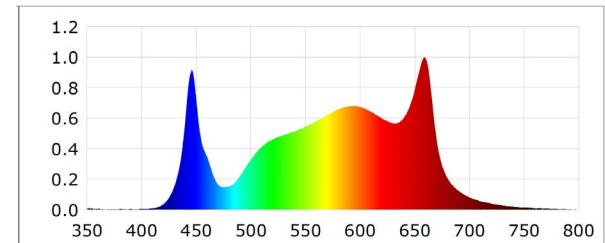

This spectrum promotes flowering, robust stem growth, and proper node spacing.



Intertek

FAST  
DELIVERY

### ELECTRICAL

120-277V 50/60Hz available, NEAM 5-15P AC Plug  
347V optional



### SMART CONTROLLER

Easily to control up to 180 fixtures with smart controller via  
RJ14 port



### WHAT'S INSIDE

- A** GLMF-700E fixture
- B** External RJ14 network cable
- C** Input power cable
- D** Power supply
- E** 8 X screws
- F** 4 X 1/8" rope ratchet
- G** Mounting brackets for power supply